


## Ejemplo tipo cadena

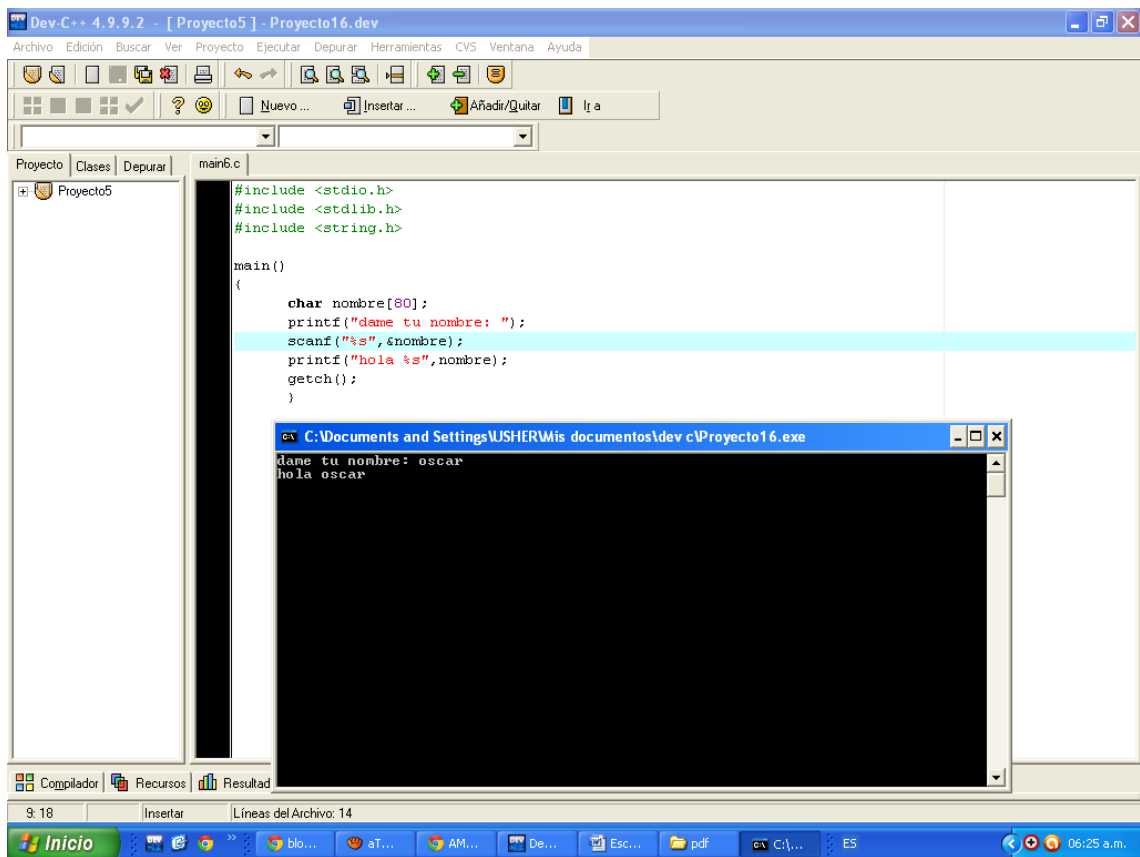

The image shows a screenshot of the Dev-C++ 4.9.9.2 IDE. The main window displays a C program named 'main6.c' with the following code:

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

main()
{
    char nombre[80];
    printf("dame tu nombre: ");
    scanf("%s", &nombre);
    printf("hola %s", nombre);
    getch();
}
```

The line containing the `scanf` function is highlighted in light blue. Below the code editor, a console window titled 'C:\Documents and Settings\JSHERWIS documentos\dev c\Proyecto16.exe' is open, showing the program's execution output:

```
dame tu nombre: oscar
hola oscar
```

The Windows taskbar at the bottom shows the system tray with the time 06:25 a.m. and the taskbar contains several open applications including 'Inicio', 'blo...', 'at...', 'AM...', 'De...', 'Esc...', 'pdf', and 'C:\...'.